

UNIVERSITY OF SWAZILAND
FACULTY OF SCIENCE
DEPARTMENT OF ELECTRICAL AND ELECTRONIC
ENGINEERING

MAIN EXAMINATION NOVEMBER 2013

TITLE OF PAPER: CONTROL ENGINEERING I
COURSE CODE: EE 431
TIME ALLOWED: THREE HOURS

Student Name:	
Student Number:	

INSTRUCTIONS:

1. Answer all questions.
2. Give your answers on the question paper, and if more space is required, complete your answer on the back of the paper or in your answer book and mention about the place of your answer completion.
3. Put the question sheet inside the answer book upon submission of your exam paper.
(DON'T FORGET TO SUBMIT BOTH OF THE ANSWER BOOK AND QUESTION PAPER)
4. Marks for different questions are indicated on the beginning of the question.
5. Rough work maybe done in the examination answer book and crossed through.

DO NOT OPEN THIS PAPER UNTIL PERMISSION HAS BEEN GRANTED BY THE INVIGILATOR


This paper starts at page 1 and ends at page 18.

Question 1: Solve the following questions (28 marks)


- a) Convert the following equation from transfer function form to state space model form $\dot{x} = Ax + Bu$, $y = Cx + Du$

$$\frac{Y(s)}{U(s)} = \frac{4s + 2}{s^3 + 5s^2 + 8s + 10}$$

b) Using mason theorem, find the overall gain of the control system represented by the following signal flow diagram.

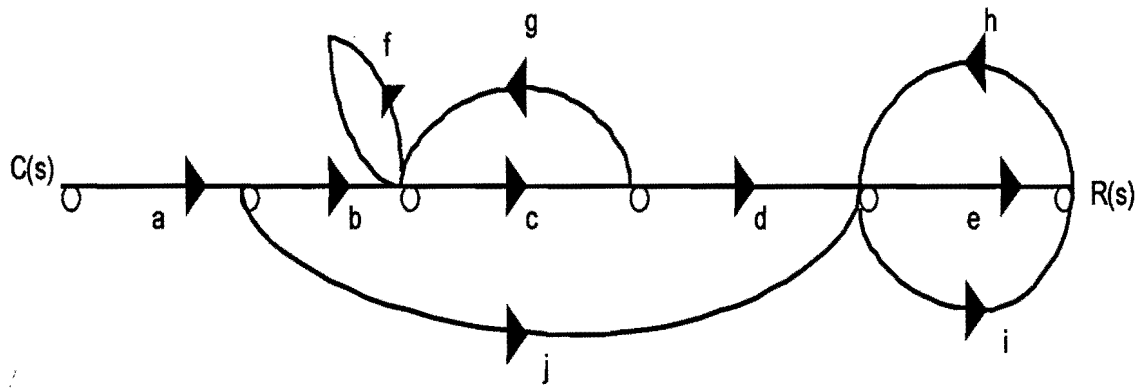

- c) If the open loop transfer function $G(s)H(s) = \frac{K}{s(1+sT_1)(1+sT_2)}$ has the following direct polar plot. Determine for the closed loop system $\frac{C(s)}{R(s)} = \frac{G(s)}{1+G(s)H(s)} = \frac{A(s)}{B(s)}$, the number of zeros of $B(s)$ on the right half of s-plane Z_R , the number of poles of $B(s)$ on the right half of s-plane P_R and the number of unstable poles in the closed loop system if they exist.

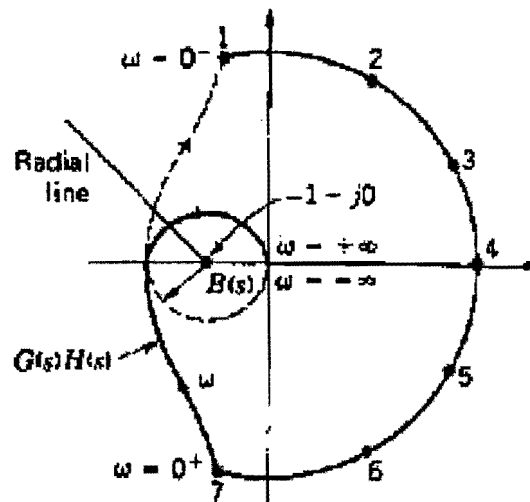


d) Consider a closed loop DC motor system with negative unity feedback, and a forward compensator $C(s)$ added in series with the DC motor to control the applied voltage to DC motor. The transfer function of motor angular speed $\frac{\omega(s)}{V(s)} = \frac{10}{(s+3)(s+8)}$. The compensator is assumed to be proportional integral

derivative compensator with the following transfer function

$$C(s) = K \left(1 + s + \frac{1}{s}\right) = K \frac{(s^2 + s + 1)}{s} = K \frac{(s + 0.5 + j0.8666)(s + 0.5 - j0.8666)}{s}$$

Sketch roughly the root locus of the closed loop system.

Note: You don't need to do root locus calculations.

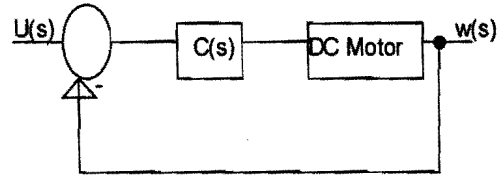

e) Mention on the following table what are the ranges of the damping coefficient that causes the following system responses.

The transient response	The range of damping coefficient ζ
System is unstable and response increases without bound.	
The system is damped with maximum overshoot >0 .	
The system is damped with maximum overshoot $=0$.	
The system is critically damped.	
System responses are pure sinusoidal.	

f) Indicate on the following table using a right mark (\checkmark) whether the following types of controllers will

- Improve the controlled system response and reduce the settling time.
- Reduce the steady state error in a controlled system.

	Reduces the steady state error	Improves the transient response and reduces the settling time.
Proportional integral controller		
Proportional derivative controller		
Phase lag compensator		
Phase lead compensator		
Lead lag compensator		
Optimal state feedback controller with tracking capability		

Question 2: Solve the following questions (36 marks)

Given that a closed loop negative feedback system with the following transfer functions for the forward and feedback gains:

$$G(s) = \frac{K}{(s^2 + 6s - 16)} = \frac{K}{(s-2)(s+8)}, \quad H(s) = \frac{1}{(s+6)}$$

The objective is to plot the root locus of the open loop transfer function $G(s)H(s)$ and to obtain the system transient response when $\zeta = 0.342$

- a) Calculate the real axis intercept of the asymptotes and the asymptotes of the root locus as s approaches infinity.

- b) Sketch roughly the initial estimate for the root locus of $G(s)H(s)$.


- c) Calculate the breakaway point on the real axis and the value of loop sensitivity K at the breakaway point if exist.

d) Write the overall system gain $\frac{C(s)}{R(s)}$ of the negative feedback system.

e) Calculate the imaginary axis crossover points and the value of loop sensitivity K at the crossover points if exist.

s^3		
s^2		
s^1		
s^0		

f) Draw the root locus of $G(s)H(s)$ based on the results obtained in the previous parts.

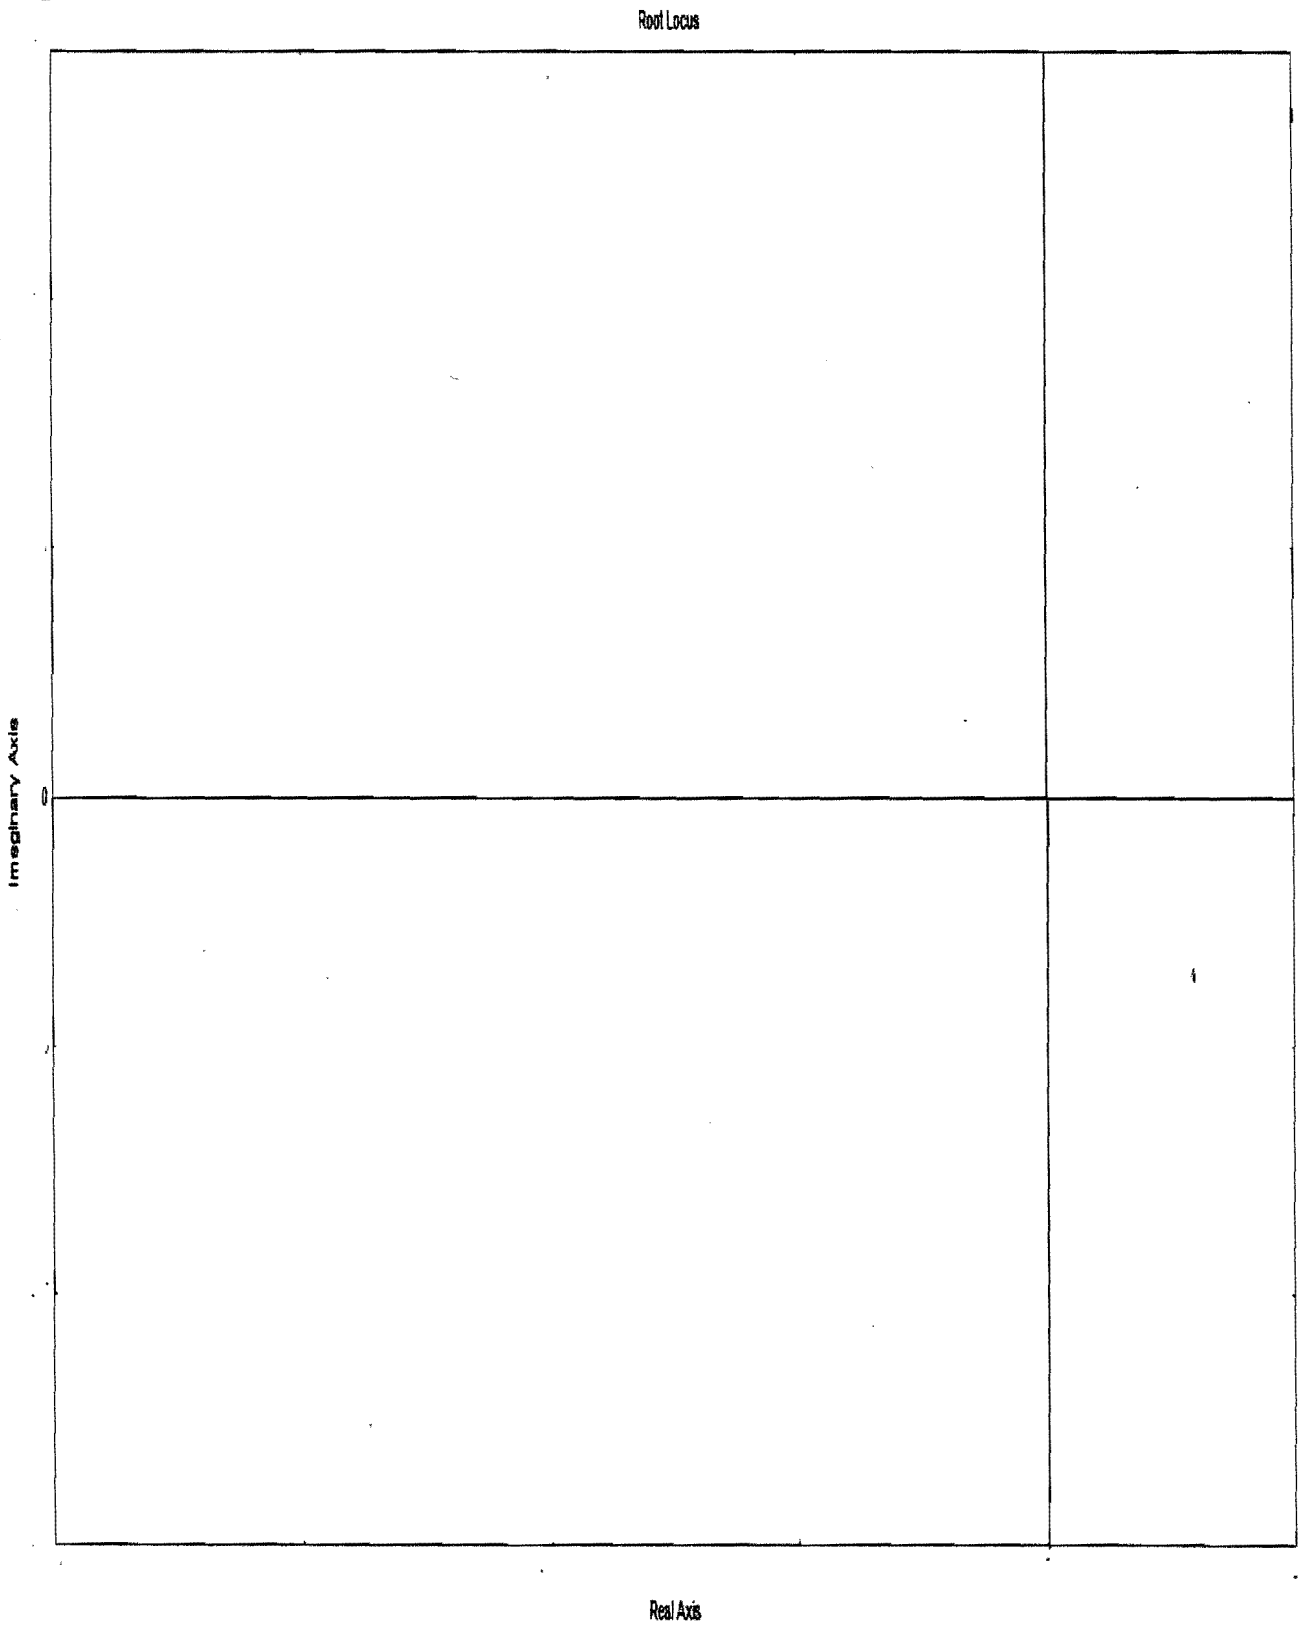

g) If a radial line corresponding to $\zeta = 0.342$ is drawn on the graph, determine the dominant poles and the value of loop sensitivity K at these points.

h) Calculate any additional roots using the grants rule.

i) Write the overall system transfer function $\frac{C(s)}{R(s)}$ with the value of gain and roots calculated previously corresponding to $\zeta = 0.342$, and then determine the transient response of $c(t)$ for a unit step input $r(t) = u(t)$. What is the steady state value of the output?

Question 3: Solve the following questions (36 marks)

The objective is to draw the bode plot and the polar plot for the following open loop transfer function

$$G(j\omega)H(j\omega) = \frac{15}{j\omega(1 + 0.015j\omega + 0.02^2(j\omega)^2)}$$

a) Complete the following table:

Term	Cutoff frequency If exist	Log magnitude equation of the asymptotes	Angle equation of the asymptotes
15			
$\frac{1}{j\omega}$			
$\frac{1}{(1 + 0.015j\omega + 0.02^2(j\omega)^2)}$			

b) Complete the following table to calculate the log magnitude and angle at certain frequencies in the composite curve.

Note: Consider the correction at cutoff frequency.


Frequency	Log Magnitude at that frequency	Angle at that frequency
0	(Not required)	
Decade before first cutoff frequency $0.1\omega_1$		
First cutoff frequency ω_1		

Frequency	Log Magnitude at that frequency	Angle at that frequency
Decade after cutoff frequency $10\omega_1$		
INFINITY	(Not Required)	

- c) Draw the composite log magnitude and phase curves for overall open loop transfer function.

$$G(j\omega)H(j\omega) = \frac{15}{j\omega(1 + 0.015j\omega + 0.02^2(j\omega)^2)}$$

Note: In the following bode diagram, put the scale that is suitable with your analysis and results.

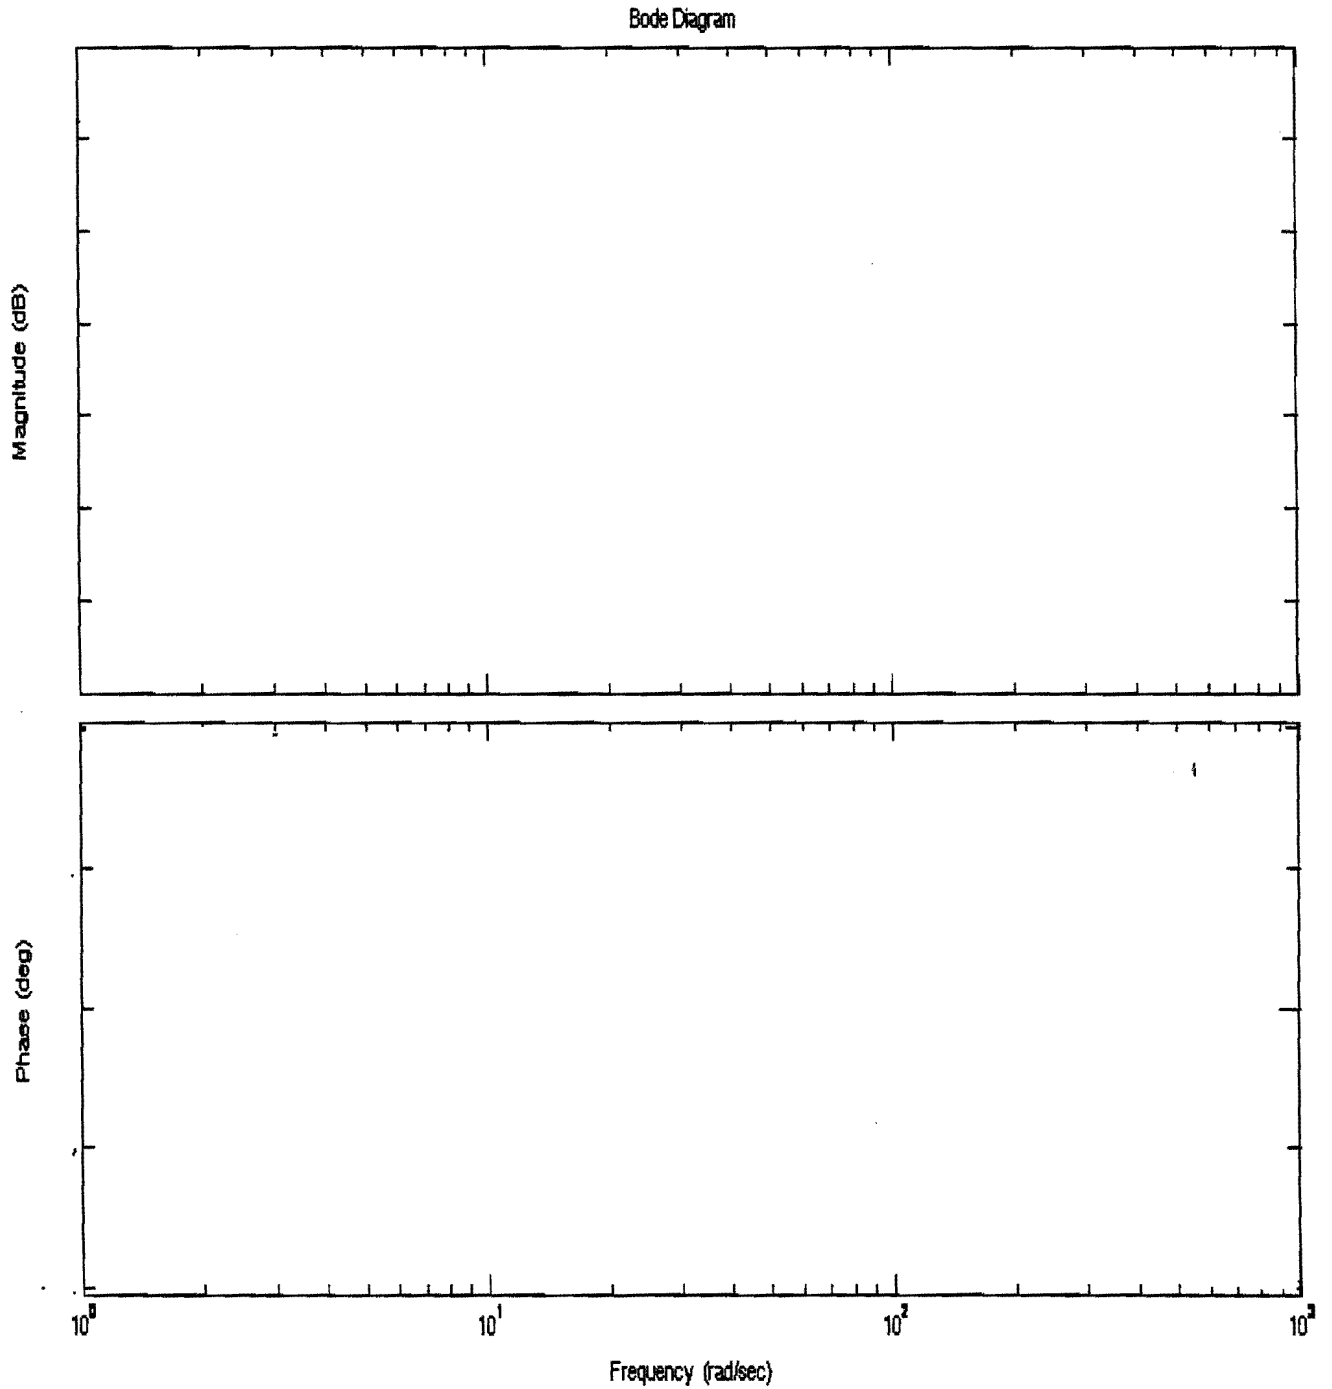

d) From the composite log magnitude and phase angles curves, estimate

Gain crossover frequency:	
Phase margin:	
Phase crossover frequency:	
Gain margin:	

e) Indicate with reasoning if the closed loop system stable or not. If the system stable calculate the gain that will cause the system to be unstable.

f) Draw roughly the polar (Nyquist) plot for the previous open loop transfer function $G(j\omega)H(j\omega) = \frac{15}{j\omega(1 + 0.015j\omega + 0.02^2(j\omega)^2)}$. Mention on the plot the

location of phase crossover frequency and gain crossover frequency. What should be phase crossover frequency and how much the gain margin?

Note: You can utilize some of the results obtained in the bode plot section in order to draw the polar plot.